PRODUCT OVERVIEW

SERVOPRO NanoChrome ULTRA

ULTRA HIGH PURITY





GAS	MEASURES	APPLICATION			
MULTIPLE	ULTRA TRACE PPT	QUALITY			







KEY APPLICATIONS

- Semiconductor production quality control measurements
- Semiconductor production stationary analytical systems
- UHP gas production quality control measurements

FROM OUR GROUND-BREAKING ULTRA SERIES, AN ULTRA TRACE ANALYZER FOR SEMICONDUCTOR PROCESSES: MEASURES H₂, CH₄, CO, CO₂, N₂, Ar AND NMHC

UNRIVALLED PERFORMANCE

- Innovative high-sensitivity
 Plasma Emission Detector
 (PED) enables ultra-trace
 measurements of Ar, N₂, H₂,
 CH₄, CO and CO₂, and NMHC
- ProPeak peak detection technique enables unprecedented measurement sensitivity
- Direct Analysis Methodology removes uncertainties of FID and RGD measurements

FLEXIBLE

- Comprehensive solution for ultra-trace H₂, CH₄, CO, CO₂, N₂, Ar and NMHC in a wide range of common background gases including He, H₂, N₂, Ar and O₂
- A complete stand-alone UHP gas analysis solution when combined with DF-500 analyzers for trace O₂ and DF-700 analyzers for trace moisture
- Digital communications for remote access: Internet/ Ethernet and RS232

EASY TO USE

- Comprehensive report monitoring software for full access to chromatograms, process results, statistics and historical values
- Internal dilution system option
- No requirement for flammable fuel gas, improving safety and simplifying installation

LOW COST OF OWNERSHIP

- Non-depleting sensor and intelligent software extends calibration intervals
- No need for methaniser or consumable fuel gas
- Cost-effective and simplified ongoing maintenance

BENCHMARK COMPLIANCE

 In compliance with Low Voltage, EMC and applicable Directives

For more information please contact us

Visit servomex.com/contact















SERVOPRO NanoChrome ULTRA

ULTRA HIGH PURITY

THE DEFINITIVE SOLUTION FOR UHP GAS MONITORING **APPLICATIONS**

Introducing the NanoChrome ULTRA...The Servomex range of ULTRA analyzers offer a complete CQC solution for UHP gases used in the semiconductor industry with LDLs down to double digit ppts. Continuing the tradition of unparalelled analysis for UHP gas, the NanoChrome ULTRA offers a redesigned software system and PED leading to improved perfomance over the standard sub ppb NanoChrome with LDLs of up to 5x less than its predecessor.

A NO COMPROMISE SOLUTION

The NanoChrome ULTRA is a game-changing analyzer that provides the highest level of performance accuracy and selectivity currently available. Using leading-edge, patented PED sensing technology, this device delivers notable advantages over comparable analysis techniques. Not only is it highly specific to the gases being measured in diverse gas streams, it also removes the need for flammable fuel gas - allowing the NanoChrome ULTRA to deliver an enhancedsafety solution. When a complete, stand-alone solution is demanded, NanoChrome ULTRA can be combined with the DF-500 (ultra-trace ppt O₂) and DF-700 (ultra-trace moisture) analyzer series.

SIMPLE MAINTENANCE AND REDUCED ONGOING COSTS

By combining Servomex's specially developed non-depleting PED technology with advanced new processing and operational software, NanoChrome ULTRA allows calibration periods to be extended, helping to reduce on-going costs considerably over product life. The addition of intelligent signal processing ensures this device offers the highest grade of accuracy, maximizing process uptime. Comprehensive digital communications protocols and access via a network or internet browser facilitate flexible remote device interaction, while an intelligent software package provides the ability to generate comprehensive reporting and statistical analysis. This makes the NanoChrome ULTRA the analyzer to which all other UHP gas monitoring analyzers will be compared.



These analyzers are not intended for any form of use on humans and are not medical devices as described in the Medical Devices Directive 93/42EEC.

Please note: Whilst every effort has been made to ensure accuracy, no responsibility can be accepted for errors and omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards and guidelines. This document is not intended to form the basis of a contract

Servomex has a policy of constant product improvement and reserves the right to change specifications without notice. @ Servomex Group Limited. 2022. A Spectris company. All rights reserved.



TECHNICAL DATA SHEET

SERVOPRO NanoChrome ULTRA



SPECIFICATIONS

GAS MEASURED	H ₂ ,	CH ₄ ,	CO,	CO ₂ ,	N_{2}	Arand

TECHNOLOGY Plasma emission detector (PED)

PERFORMANCE		Background Gas						
		Ar	H2 He		N ₂	O ₂		
	CH ₄	100ppt						
	со	100ppt						
	CO ₂	100ppt						
Impurity LOD †	NMHC			100ppt				
	N ₂		100ppt		N/A	300ppt		
	H ₂	500ppt	N/A	500ppt				
	Ar	N/A	500ppt					

0-250ppb •

The greater of ±2% of reading or LOD

The greater of ±2% of reading or LOD

SIGNAL OUTPUTS/INPUTS

1 x 4-20mA output per peak - up to 8 outputs **Analog output**

1 x remote range identification output per peak - up to 8 **Digital outputs**

2 x alarm dry contact outputs - user pre-settable limited

1 x system status dry contact output

Digital inputs 1 x digital isolated input - remote initiation of analysis

Serial comms Remote interaction via RS232 ASCII protocol and ethernet/internet

OPTIONS

Internal, integrated system. Enables calibration with 5ppm cal gas

PHYSICAL

482mm (18.9") Wide x 177mm (7") High x 600mm (23.6") Deep (per chassis)

Weight 11-27kg (25-60lb) (application dependent)

OPERATING ENVIRONMENT

 $+5^{\circ}$ C to $+40^{\circ}$ C ($+41^{\circ}$ F to $+104^{\circ}$ F)

Relative humidity 0-95% RH non-condensing

2,000m (max)

IP20

The performance specification has been written and verified in accordance with the international standard IEC 61207-1:1994 "Expression of performance of gas analyzers"













[†] LOD: 3 sigma 95% confidence limit • Other ranges available on request



SAMPLE GAS					
Condition	Oil free, non-corrosive, non-condensing				
Sample flow	50 to 300ml/min (application dependent)				
Sample pressure	30psig (application dependent)				
CARRIER GAS *					
Specification	He carrier gas recommended to be free of Ar (<1ppb) when measuring Argon impurity				
Inlet pressure	O ₂ background gas = 85psig, other background gases = 80psig				
Flow	90 to 810ml/min				
UTILITIES					
Supply voltage	100-120Vac or 220-240Vac**, 50/60Hz				

- * Normally helium. Argon carrier gas used for N₂ determination in Argon
- ** The analyzer is supplied configured with one of these voltage ranges; specify range at time of order

COMPLIANCE


EC DIRECTIVES

This product complies with the EMC Directive, the Low Voltage Directive, and all other applicable directives.

ELECTRICAL SAFETY

Electrical safety to IEC 61010-1 Rated for "Overvoltage Category II" and "Pollution Degree 2"

DIMENSIONAL DRAWINGS

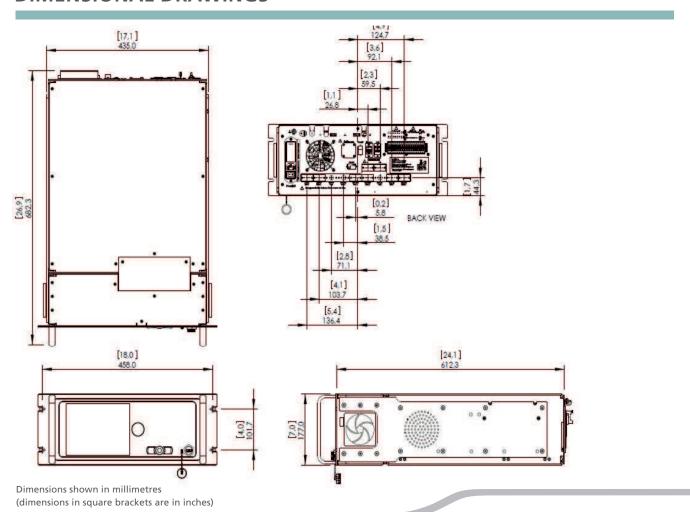











APPLICATION CONFIGURATIONS

SERVOMEX 5

	Packages	Application	Form Factor			
	Pack 1A	N_2	MC			
ARGON	Pack 1B	CO ₂ , CH ₄ , NMHC	MC			
	Pack 2A	H ₂ , CO	PC + SC			
	Pack 3A	H ₂ , CO, CO ₂ , CH ₄	MC + SC			
	Pack 3B	N ₂ , CO, CO ₂ , CH ₄	MC + SC			
	Pack 3C	H ₂ , CO, CO ₂ , CH ₄ , NMHC	MC + SC			
	Pack 3D	N ₂ , CO, CO ₂ , CH ₄ , NMHC	MC + SC			
	Pack 4A	N ₂ , H ₂ , CO, CO ₂ , CH ₄	PC + SC + SC			
	Pack 4B	N ₂ , H ₂ , CO, CO ₂ , CH ₄ , NMHC	PC + SC + SC			
	Pack 1A	Ar	MC			
	Pack 1B	Н,	MC			
	Pack 1C	CO ₂ , CH ₄ , NMHC	MC			
	Pack 2A	H ₂ , CO	PC + SC			
	Pack 2B	CO, CO ₂ , CH ₄	PC + SC			
NITROGEN	Pack 2C	CO, CO ₂ , CH ₄ , NMHC	PC + SC			
	Pack 3A	H ₂ , CO, CO ₂ , CH ₄	MC + SC			
	Pack 3B	2 2 4	MC + SC			
		H ₂ , CO, CO ₂ , CH ₄ , NMHC				
	Pack 4A	Ar, H ₂ , CO, CO, CH, NIMHC	PC + SC + SC			
	Pack 4B	Ar, H ₂ , CO, CO ₂ , CH ₄ , NMHC	PC + SC + SC			
	Pack 1A	Ar	MC			
	Pack 2A	Ar, N ₂	PC + SC			
	Pack 2B	N ₂ , H ₂ , CH ₄	PC + SC			
	Pack 2C	CH₄, NMHC	PC + SC			
	Pack 2D	CH ₄ , H ₂ , CO	PC + SC			
	Pack 3A	CO, CO ₂ , H ₂ , CH ₄	MC + SC			
	Pack 3B	N ₂ , Ar, CH ₄	MC + SC			
OXYGEN	Pack 3C	CO ₂ , H ₂ , CH ₄ , NMHC	MC + SC			
	Pack 4A	N_2 , CO, CO ₂ , H_2 , CH ₄	PC + SC + SC			
	Pack 4B	Ar, H ₂ , CO, CO ₂ , CH ₄	PC + SC + SC			
	Pack 4C	H ₂ , CO, CO ₂ , CH ₄ , NMHC	PC + SC + SC			
	Pack 5A	Ar, N ₂ , H ₂ , CO, CO ₂ , CH ₄	MC + SC + SC			
	Pack 5B	N ₂ , H ₂ , CO, CO ₂ , CH ₄ , NMHC	MC + SC + SC			
	Pack 5C	Ar, H ₂ , CO, CO ₂ , CH ₄ , NMHC	MC + SC + SC			
	Pack 5D	Ar, N ₂ , H ₂ , CO, CO ₂ , CH ₄ , NMHC	MC + SC + SC			
	Pack 1A	N_2	MC			
	Pack 1B	СО	MC			
	Pack 1C	CO ₂ , CH ₄ , NMHC	MC			
	Pack 2A	co, co,	PC + SC			
	Pack 2B	Ar, N ₂	PC + SC			
HYDROGEN	Pack 2C	CO, CO ₂ , CH ₄	PC + SC			
	Pack 2D	CO, CO ₂ , CH ₄ , NMHC	PC + SC			
	Pack 3A	N ₂ , CO, CO ₂ , CH ₄	MC + SC			
	Pack 3B	CO, CO ₂ , CH ₄ , NMHC, H ₂	MC + SC			
	Pack 4A	Ar, N ₂ , CO, CO ₂ , CH ₄	PC + SC + SC			
	Pack 4B	Ar, N_2 , CO, CO ₂ , CH ₄ , NMHC	PC + SC + SC			
	Pack 1A	N ₂	MC MC			
	Pack 1B	CO, CO ₂ , CH ₄	MC			
	Pack 1C	CO_2 , CH_4 CO_3 , CH_4 , NMHC	MC			
	Pack 2A		PC + SC			
HELIUM		Ar, N ₂				
TIELIOWI	Pack 2B	CO, CO ₂ , CH ₄ , NMHC	PC + SC			
	Pack 3A	N ₂ , H ₂ , CO, CO ₂ , CH ₄	MC + SC			
	Pack 3B	N ₂ , H ₂ , CO, CO ₂ , CH ₄ , NMHC	MC + SC			
	Pack 3C	Ar, N ₂ , H ₂ , CO, CO ₂ , CH ₄	MC + SC			
	Pack 3D	Ar, N ₂ , H ₂ , CO, CO ₂ , CH ₄ , NMHC	MC + SC			
NOTES	MC = MASTER CHASSIS, SC = SECONDARY CHASSIS, PC = STAND-ALONE COMPUTER					











> WE'RE READY TO HELP

WHATEVER YOUR GAS ANALYSIS REQUIREMENTS, WHEREVER YOU ARE

These analyzers are not intended for any form of use on humans and are not medical devices as described in the Medical Devices Directive 93/42EEC.

Please note: Whilst every effort has been made to ensure accuracy, no responsibility can be accepted for errors and omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards and guidelines. This document is not intended to form the basis of a contract.

Servomex has a policy of constant product improvement and reserves the right to change specifications without notice. © Servomex Group Limited. 2022. A Spectris company. All rights reserved.

